



CONCRETE LOOK

ANDERS™  
GLAZED PORCELAIN

 daltile®  
IMAGINE WHAT'S POSSIBLE™

# ANDERS™

GLAZED PORCELAIN

Surround yourself with simplistic serenity with our concrete look, Anders. Offered in both warm and cool tones in an impressive 32 x 32 size, Anders is the canvas to any interior style. Infuse your space with harmony and calm – a minimalist's essential.

## CONCRETE LOOK

### USAGE



### SPECIAL FEATURES

Cover photo features Anders™ Frost 32 x 32 matte on the floor and STARE™ Eclletica™ Sage 15 x 48 diamond wall tile matte on the dressing room wall. Above photo features Anders™ Shadow 32 x 32 matte on the floor, Panoramic Porcelain Surfaces™ Metallic Selection Brass matte on the wall and Panoramic Porcelain Surfaces™ Elemental Selection Calacatta Topaz glossy on the countertop.

SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:



FINISHES: MATTE

COLOR PALETTE



MIST



GLACIER



FROST



SHADOW


FLOOR TILE



MIST AN10



GLACIER AN12

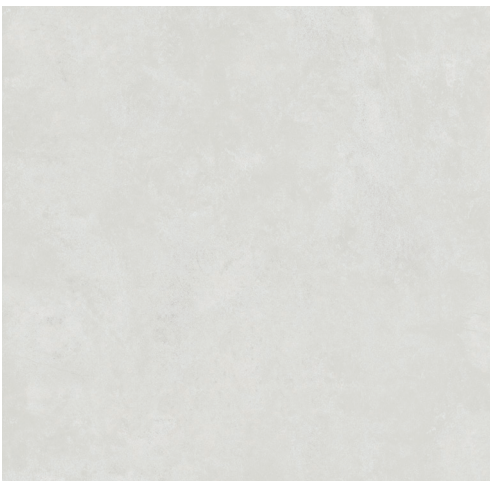

FROST AN11



SHADOW AN13



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT




CLIMATEPRO™



SIMPLICLEAN™

**SIZES**

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	32 x 32 Floor Tile	(31-1/2" x 31-1/2") (80.00 cm x 80.00 cm)	3/8"	13.78	2

**APPLICATIONS**


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

**APPLICATION NOTES:**

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

**INSTALLATION**

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

**PERFORMANCE CHARACTERISTICS**

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

**DURABILITY**

Floor Surface Wear Resistance		
1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

**NOTES**

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [daltile.com](http://daltile.com).

 **REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).