

STONE
LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



C.G.
SLIP-RESIST



LOW HIGH

SPECIAL FEATURES



CORE FUNDAMENTALS™ PRIME

THE **PRIME TIER** PROVIDES ALL THE ESSENTIAL BENEFITS OF TILE WHILE OFFERING AN ARRAY OF DIFFERENT LOOKS AND DECORATIVE ACCENTS TO HEIGHTEN DESIGN.



NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE CHARTS
FOR FULL PRODUCT DETAILS.

CORE FUNDAMENTALS™ – PRIME

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Beige BA31 12 x 24 on the floor.

FLOOR TILE



WHITE BA30



BEIGE BA31



BROWN BA33

10 x 14 | 4 x 12 WALL TILE



WHITE BA30



BEIGE BA31



BROWN BA33

2 x 4 MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET



WHITE BA30



BEIGE BA31



BROWN BA33

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



10 x 14
Wall Tile



4 x 12
Wall Tile



2 x 4
Straight-joint Mosaic

FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Grey EL32 12 x 24 on the floor.

FLOOR TILE



WHITE EL30



BEIGE EL31



GREY EL32

1 x 3 HERRINGBONE MOSAIC – DOT-MOUNTED ON A 9 x 12 SHEET



WHITE EL30



BEIGE EL31



GREY EL32

WALL TILE



WHITE EL30



BEIGE EL31



GREY EL32

AVAILABLE TILE SIZES



12 x 24
Floor Tile



4 x 12
Wall Tile



1 x 3
Herringbone Mosaic

FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME


GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE | GLOSSY




Photo features Grey KC04 12 x 24 floor with White KC01 4 x 12 wall tile and Cool Catena KC07 4 x 12 decorative accent on the backsplash.


FLOOR TILE

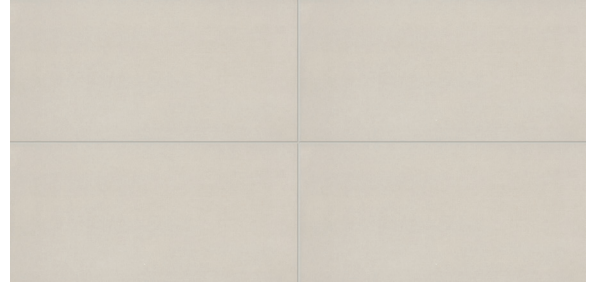

WHITE KC01

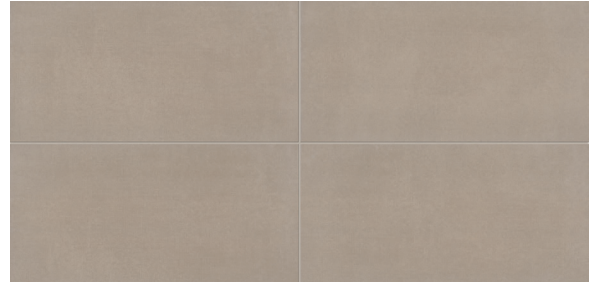


GREIGE KC03

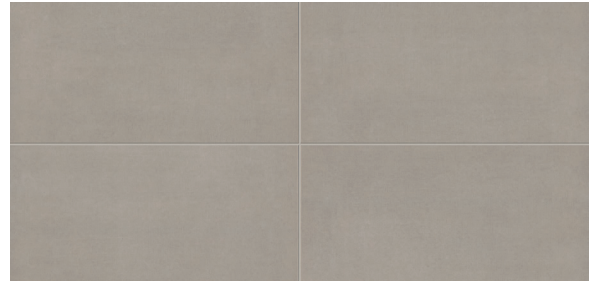

GREY KC04


10 x 14 WALL TILE

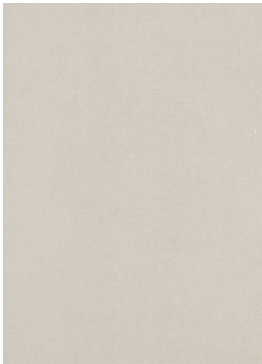

WHITE KC01



GREIGE KC03

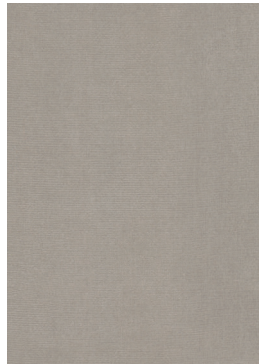


GREY KC04

4 x 12 DECORATIVE WALL ACCENTS




WARM CATENA KC08



COOL CATENA KC07

2 x 2 MOSAIC – DOT-MOUNTED ON A 12 x 24 SHEET

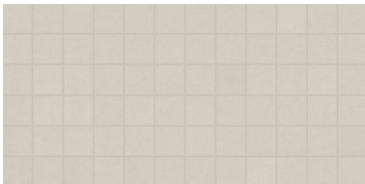

WHITE KC01



GREIGE KC03



GREY KC04

AVAILABLE TILE SIZES



18 x 18
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



10 x 14
Wall Tile



4 x 12
Wall Tile



2 x 2
Mosaic

FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

FINISHES: MATTE | GLOSSY

GLAZED CERAMIC FLOOR, WALL & MOSAICS



Photo features Vitality White RL20 on the floor.

FLOOR TILE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23

4 x 16 WALL TILE – FLAT



VITALITY WHITE RL20



DYNAMIC BEIGE RL21



STAMINA GREY RL23

4 x 16 WALL TILE – WAVE



VITALITY WHITE RL20




DYNAMIC BEIGE RL21




STAMINA GREY RL23


1.5" HEX MOSAIC – DOT-MOUNTED ON A 12 x 10 SHEET



VITALITY WHITE RL20



DYNAMIC BEIGE RL21



STAMINA GREY RL23

AVAILABLE TILE SIZES



18 x 36
Floor Tile



12 x 24
Floor Tile



12 x 12
Floor Tile



10 x 14
Wall Tile



4 x 16
Wall Tile



4 x 16 Wave
Wall Tile



1.5" Hex
Mosaic

FOR COMPLETE PRODUCT INFORMATION,
PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

FINISHES: MATTE

GLAZED CERAMIC FLOOR, WALL & MOSAICS



Photo features Gray SY98 2 x 4 brick-joint mosaic and Gray SY98 10 x 14 wall tile on the wall and Off White SY95 18 x 18 floor tile on the floor.

FLOOR TILE



OFF WHITE SY95



GRAY SY98

10 x 14 WALL TILE



OFF WHITE SY95



GRAY SY98

2 x 4 BRICK-JOINT MOSAIC – DOT-MOUNTED ON A 12 x 12 SHEET




OFF WHITE SY95



GRAY SY98

AVAILABLE TILE SIZES



FOR COMPLETE PRODUCT INFORMATION, PLEASE VISIT WWW.DAL TILE/CORE-FUNDAMENTALS

CORE FUNDAMENTALS™ – PRIME

GLAZED CERAMIC FLOOR, WALL & MOSAICS

FINISHES: MATTE



Photo features Cenere Fog SV98 18 x 18 on the floor.

FLOOR TILE



CENERE FOG SV98

WALL TILE




CENERE FOG SV98

MOSAIC – 2 x 2 MOSAIC DOT-MOUNTED ON A 12 x 24 SHEET




CENERE FOG SV98

MOSAIC – 2" OCTAGON & 1" DOT MOSAIC DOT-MOUNTED ON A 12 x 12 SHEET



CENERE FOG SV98

2 x 10 DECORATIVE WALL ACCENTS




CESTINO FRESCO SV94




CESTINO CALDO SV95


AVAILABLE TILE SIZES

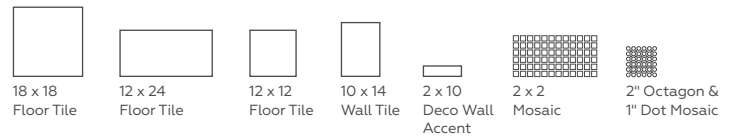

FLOOR TILE



RAINIER 1500



BLACK 2011

AVAILABLE TILE SIZES



CORE FUNDAMENTALS™ – PRIME

AVAILABLE SIZE & TRIM SHAPES

PRIME

PLEASE REFER TO CHART ON NEXT PAGE FOR AVAILABILITY BASED ON COLOR CODE

























FLOOR			FLOOR TRIM		
	18 x 36 Floor Tile	(17-7/8" x 35-3/4") (45.40 cm x 90.80 cm)		P43F9	3 x 24 Floor Bullnose
	18 x 18 Floor Tile	(17-11/16" x 17-11/16") (45.01 cm x 45.01 cm)		P43C9 OR S43C9	3 x 12 Floor Bullnose
	12 x 24 Floor Tile	(11-13/16" x 23-11/16") (30.02 cm x 60.12 cm)	WALL TRIM		
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.02 cm x 30.02 cm)		S4310	3 x 10 Wall Bullnose
WALL				SN4310	3 x 10 Wall Bullnose Corner
	10 x 14 Wall Tile	(9-13/16" x 13-15/16") (24.99 cm x 35.40 cm)		S4489MOD	4 x 8 Wall Bullnose - 8" side
	4 x 16 Wall Tile	(4" x 16") (10.17 cm x 40.68 cm)		S4849MOD	4 x 8 Wall Bullnose - 4" side
	4 x 16 Wave Wall Tile	(4" x 16") (10.17 cm x 40.68 cm)		SCRL4489M	4 x 8 Wall Bullnose Corner - Left
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.88 cm x 32.76 cm)		SCR4489M	4 x 8 Wall Bullnose Corner - Right
	4 x 8 Wall Tile	(4-1/4" x 8-9/16") (10.88 cm x 21.82 cm)		S1/212J	12" Jolly
DECORATIVE				A106	1 x 6 Quarter Round
	4 x 12 Wall Deco	(4-1/4" x 12-7/8") (10.88 cm x 32.76 cm)		UC106	1 x 1 Quarter Round Corner
	2 x 10 Wall Deco	(1-3/4" x 9-7/8") (4.50 cm x 24.90 cm)	MOSAICS		
	2 x 4 Brick-joint Mosaic Dot-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)			
	2 x 4 Straight-joint Mosaic Dot-mounted	(14" x 12" Sheet) (35.56 cm x 30.48 cm Sheet)			
	2 x 2 Mosaic Dot-mounted	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)			
	2" Octagon & 1" Dot Mosaic Dot-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)			
	1.5" Hex Mosaic Dot-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)			
	1 x 3 Herringbone Mosaic Dot-mounted	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)			



Photo features Cenere Fog SV98 2 x 2 mosaic on the wall.

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – BA30 | BA31 | BA33 | KC01 | KC03 | KC04 | KC07 | KC08

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)</p> <p>Wall: 10 x 14: 1/16" 4 x 12: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%)</p> <p>Mosaic: 1/8"</p>	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

PRIME – EL30 | EL31 | EL32

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)</p> <p>Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%)</p> <p>Mosaic: 1/8"</p>	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – RL20 | RL21 | RL23

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) Wall: 10 x 14: 1/16" 4 x 16: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%) Mosaic: 1/8"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms (3)	All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial

PRIME – SV94 | SV95 | SV98

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) Wall: 1/16" Mosaic: 1/8"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms (3)	All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial

CORE FUNDAMENTALS™ – PRIME

APPLICATION SPECIFICATIONS

PRIME – SY95 | SY98

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application

** Mosaic tile only

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)</p> <p>Wall: 1/16"</p> <p>Mosaic: 1/8"</p>	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	7.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

PRIME – 1500 | 2011

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms (3)	All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial