



WOOD LOOK

EMERSON WOOD™

COLORBODY™ PORCELAIN FLOOR, 3D CUBE MOSAIC &
2 x 2 GLAZED CERAMIC MOSAIC



 **daltile**®
IMAGINE WHAT'S POSSIBLE™

EMERSON WOOD™

COLORBODY™ PORCELAIN FLOOR, 3D CUBE MOSAIC &
2 x 2 GLAZED CERAMIC MOSAIC

Modern Restoration

Enrich a contemporary design with the organic look of Emerson Wood™. Emerson Wood features a subtle wirebrush effect over the graining to achieve an authentic cerused wood texture and visual. Combine all three plank sizes and add the 3D cube mosaic to elevate your space with visual interest and style. Floor tile and 3D cube mosaic feature StepWise™ technology making Emerson Wood a proven winner for outdoor spaces.

- AUTHENTIC WOOD LOOK
 - Subtle wirebrush effect accentuates the wood grain within each of the five natural colors
 - Floor tile and 3D cube mosaic feature StepWise™ technology offering increased safety and slip resistance for exterior applications
- EXCLUSIVE FORMATS
 - Floor tile offered in three extra-long plank sizes: 12 x 48, 8 x 48 and 6 x 48
 - 3D Cube mosaic suitable for exterior applications and 2 x 2 mosaic suitable for shower floors

WOOD LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC



LOW HIGH

SPECIAL FEATURES

Cover photo features Emerson Wood™ Hickory Pecan 6 x 48 on the wall in a chevron pattern and Brazilian Walnut 6 x 48 on the floor in a staggered brick-joint pattern. Above photo features Emerson Wood™ Ash White 3D Cube mosaic on the floor.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES:




FINISHES: MATTE

COLOR PALETTE



COLORBODY™ PORCELAIN FLOOR TILE with STEPWISE™

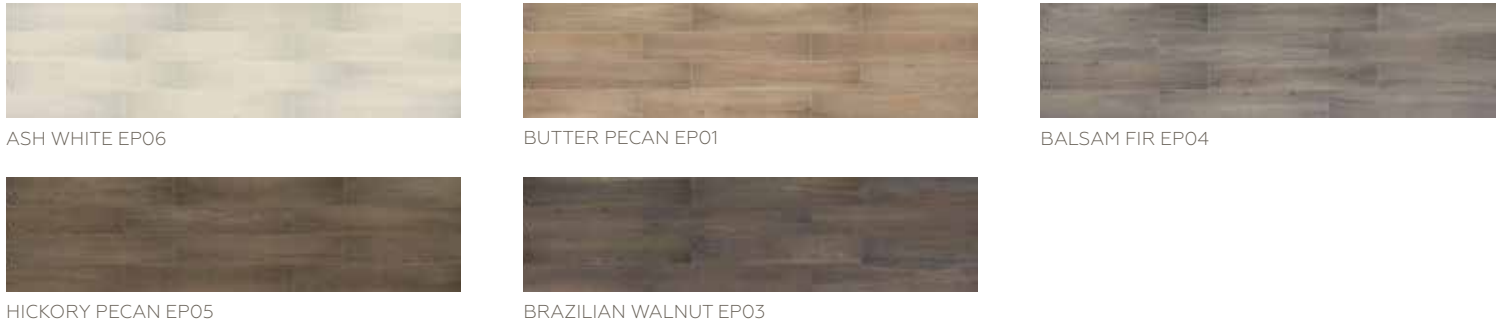

COLORBODY™ PORCELAIN 3D CUBE MOSAIC with STEPWISE™



GLAZED CERAMIC 2 x 2 MOSAIC



50% MORE SLIP RESISTANT THAN ORDINARY TILE*

*When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



INDOOR/OUTDOOR



SIMPLECLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

EMERSON WOOD™

COLORBODY™ PORCELAIN FLOOR, 3D CUBE MOSAIC & 2 x 2 GLAZED CERAMIC MOSAIC

WOOD LOOK



ALL STYLE. NO SLIPS.

Don't tip-toe through life. Step stylishly on non-slip tile that's 50% more slip resistant than ordinary tile. And because it's Daltile, you'll find beautiful natural looks that are waterproof, scratchproof, stainproof and dentproof.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 48 Floor Tile	(11-5/8" x 46-15/16") (29.56 cm x 119.30 cm)	5/16"	11.40	3
	8 x 48 Floor Tile	(7-3/4" x 46-15/16") (19.71 cm x 119.30 cm)	5/16"	15.18	6
	6 x 48 Floor Tile	(5-3/4" x 46-15/16") (14.71 cm x 119.30 cm)	5/16"	15.12	8
	3D Cube Mosaic† (Mesh-mounted)	(11-1/2" x 11-1/2" Sheet) (29.21 cm x 29.21 cm Sheet)	5/16"	6.20	10
	2 x 2 Mosaic (Dot-mounted)	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

† 3D Cube mosaic with StepWise™ technology requires special installation considerations. Please refer to daltile.com/EmersonWood for more information.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	✓**
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Floor and 3D Cube mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

2 x 2 mosaic tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* 2 x 2 mosaic tile only

** Floor and 3D Cube mosaic tile with StepWise™ technology only.
For more information, visit daltile.com/StepWise.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%). Mosaic: 1/8"	Random (V4)

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor/3D Cube Result	2 x 2 Mosaic Result
Water Absorption	C373	< 0.5%	< 3.0%
Breaking Strength	C648	> 275 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

POST-CONSUMER RECYCLED MATERIALS

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

ZEROTOX
Healthy Homes | Healthy Planet

CERTIFIED
PORCELAIN
TILE
0.5% or less water absorption

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.

daltile
IMAGINE WHAT'S POSSIBLE™
©2021 Daltile (5/21)