



STONE LOOK

ENLITE™  
COLORBODY™ PORCELAIN



 **dalTile**®  
IMAGINE WHAT'S POSSIBLE™

# ENLITE™

COLORBODY™ PORCELAIN

## Existential Composure

Sooth your soul and awaken your senses with tranquil design. Finding beauty in the passing of time, Enlite™ embraces the calming effect of organic, natural stone visuals in a harmonious color palette. Enlite celebrates the belief that less is more with the simple offer of a new 15x30 floor tile and a random linear mosaic.

- EMBRACING HARMONY
  - Awaken the soul with tranquil design
  - Natural stone visuals in five calming colors
- MINIMALIST POSSIBILITIES
  - A new 15 x 30 floor tile size for serene spaces
  - Established random linear mosaic for added beauty

STONE  
LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER  
FLOOR



EXTERIOR  
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN  
THE U.S.A.



LARGE  
FORMAT



MOSAIC/  
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



PC  
POLISHED CERAMIC



LOW HIGH

SPECIAL FEATURES

Cover photo features Enlite™ Nirvana 15 x 30 on the wall and Awaken 15 x 30 on the floor.  
Above photo features Enlite™ Clarity 15 x 30 on the floor.

NOT APPLICABLE  
FOR ALL PRODUCTS  
IN THIS SERIES. SEE  
CHARTS FOR FULL  
PRODUCT DETAILS.

SIZES:



15 x 30  
Floor Tile



Random Linear  
Mosaic

FINISHES: MATTE

COLOR PALETTE



ILLUMINATE



AWAKEN



CLARITY



NIRVANA



TRANSCEND

FLOOR TILE



ILLUMINATE EL60



AWAKEN EL61



CLARITY EL62




NIRVANA EL63



TRANSCEND EL64

RANDOM LINEAR MOSAIC

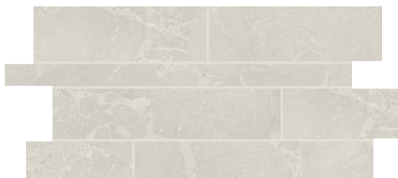

ILLUMINATE EL60




AWAKEN EL61



CLARITY EL62



NIRVANA EL63

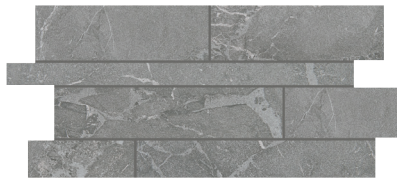

TRANSCEND EL64



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT  
\*Not Applicable to Mesh-Mounted  
Mosaics





CLIMATEPRO™



SIMPLICLEAN™

**SIZES**

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	15 x 30 Floor Tile	(14-15/16" x 30") (38.00 cm x 76.30 cm)	5/16"	15.60	5
	Random Linear Mosaic (Mesh-mounted)	(12" x 24" Sheet) (30.48 cm x 60.96 cm)	5/16"	7.60	4

**APPLICATIONS**


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).


**APPLICATION NOTES:**

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

**TRIM**

Type	Number	Size	Pieces/ Carton
 Bullnose	P439B	3 x 15	20

**INSTALLATION**

Grout Joint Recommendation	Shade Variation
<b>Floor:</b> 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 Medium (V2)
<b>Mosaic:</b> 1/8"	

**PERFORMANCE CHARACTERISTICS**

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

**DURABILITY**

Floor Surface Wear Resistance		
1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

**NOTES**

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).

