



MOSAIC

ILLUMINARY™  
GLASS



 daltile®  
IMAGINE WHAT'S POSSIBLE™

# ILLUMINARY™

GLASS

## Captivating Iridescence

Step beyond ordinary and create an unforgettable feature wall with Illuminary™. With its mesmerizing hues and calming influence, Illuminary creates walls with beguiling glamour. Available in three unique mosaic patterns, comprised of eight iridescent color blends and four solid colors, Illuminary elevates any space. Modified Herringbone, Accordion and Oscillating mosaics feature a parallelogram assembled in three beautiful patterns.

- AN EYE FOR INTRIGUE
  - Parallelogram assembled in three unique mosaic patterns
  - Mosaics available in eight iridescent color blends and four solid colors
- ENLIGHTENED DESIGN
  - Three mosaic patterns: Modified Herringbone, Accordion and Oscillating

### MOSAIC

#### USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



GLASS

### SPECIAL FEATURES



SEE CHARTS FOR FULL PRODUCT DETAILS

Cover photo features Illuminary™ Sandbar modified herringbone mosaic on the wall.

Above photo features Illuminary™ Kindle Blend accordion mosaic on the wall.

SIZES:



Oscillating Mosaic  
(Paper-face mounted)



Accordion Mosaic  
(Paper-face mounted)



Modified Herringbone Mosaic  
(Paper-face mounted)

FINISHES: GLOSSY


OSCILLATING MOSAIC




ALLUSION BLEND IL96



WHISPER BLEND IL99

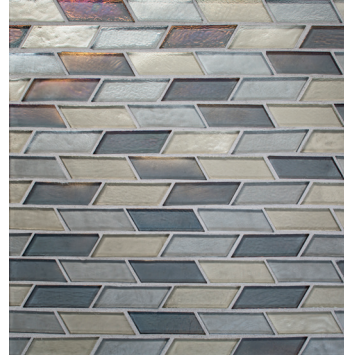

RADIANCE BLEND IL97

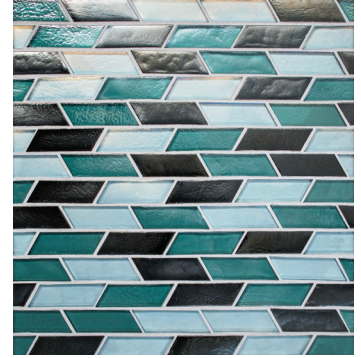

TOPIARY BLEND IL98

ACCORDION MOSAIC




WISP BLEND IL94



ILLUSTRIOUS BLEND IL95



SERENATA BLEND IL93

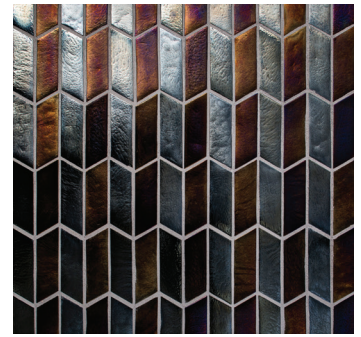

KINDLE BLEND IL92


MODIFIED HERRINGBONE MOSAIC




ICICLE ILO1



SILVERLIGHT ILO3




SANDBAR ILO4

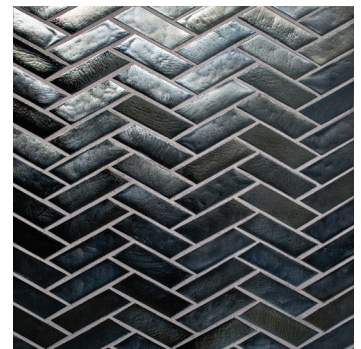

PEWTER ILO6

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	Oscillating Mosaic (Paper-face mounted) (11-3/16" x 11-1/2" Sheet) (28.40 cm x 29.30 cm Sheet)	1/4"	13.50	15
	Accordion Mosaic (Paper-face mounted) (11-1/2" x 11-1/8" Sheet) (29.30 cm x 28.40 cm Sheet)	1/4"	13.35	15
	Modified Herringbone Mosaic (Paper-face mounted) (11-5/8" x 11-7/16" Sheet) (29.60 cm x 29.10 cm Sheet)	1/4"	13.80	15

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	✓
Pool Tank/Submerged	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest®, visit [daltile.com/DCOF](http://daltile.com/DCOF).

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Mosaics: 1/16"	 Random (V4)*

\* Oscillating Mosaic

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	≥ 350 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

NOTES

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).

