



MARBLE LOOK

**RAVEL™**  
GLAZED PORCELAIN

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™

# RAVEL™

GLAZED PORCELAIN

Unlock the sublime elegance of natural stone in the extravagant 32 x 32 format for a seamless design that will stand the test of time. Available in four of our most coveted marble and stone looks, each with an authentic veining visual and your choice of a matte or polished finish. Where Ravel goes, luxury follows.

## MARBLE LOOK

### USAGE



## SPECIAL FEATURES

Cover photo features Ravel™ Lace 32 x 32 matte on the floor and Lace 32 x 32 polished on the back wall.

Above photo features Ravel™ Opal 32 x 32 matte on the floor.

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

RAVEL™  
GLAZED PORCELAIN

SIZES:



FINISHES: MATTE | POLISHED

COLOR PALETTE




LACE



OPAL



PLATINUM



CAVIAR


FLOOR TILE



LACE RA10



OPAL RA11

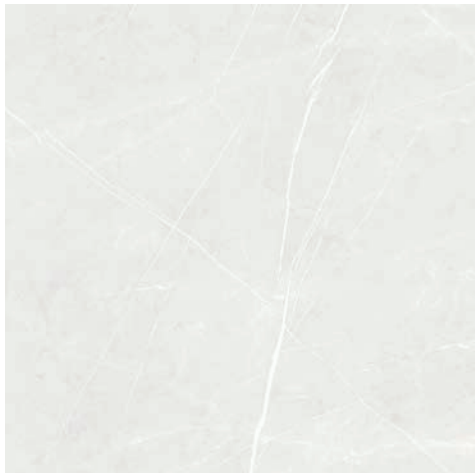

PLATINUM RA12



CAVIAR RA13



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT\*  
\*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT [WWW.DAL TILE.COM](http://WWW.DAL TILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# RAVEL™

GLAZED PORCELAIN

MARBLE LOOK

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	32 x 32 Floor Tile	(31-1/2" x 31-1/2") (80.00 cm x 80.00 cm)	3/8"	13.78	2

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications, (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

\* Matte finish only.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Random (V4)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0 (Matte) 5.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [daltile.com](http://daltile.com).

### REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).

