

6.0 mm | 20 Mil

BELLAMY PLACE™

RIGID CLICK

PROSERIES™

LUXURY VINYL FLOORING

 daltile



SuperGuard™
REINFORCED SHIELD

UNICLIC®
PATENTED TECHNOLOGY

6.0 mm | 20 Mil

BELLAMY PLACE™

RIGID CLICK

AUTHENTIC BEAUTY

Bellamy Place™ offers the authenticity of real wood with the ease and confidence of luxury vinyl flooring. European-inspired design matched with the premier Embossed in Register technique create tight realistic grooves – luxury that you can feel. Indulge in a rich color palette that is curated to elevate any space and thoughtfully designed to withstand the test of trends. Bellamy Place™ introduces an extra-long 9" x 60" wood plank and features our patented Uniclic® locking mechanism for quick installation.

ELEGANT DESIGN

- 9" x 60" wood look planks
- Cool to warm tone color palette
- Multi-layer SPC rigid core with Uniclic® Locking System
- Embossed in Register surface for realistic look and feel
- Painted bevel for realistic wood look and feel
- 6.0 mm Thickness

BUILT TO LAST

- SuperGuard™ Technology
- 20 Mil wear layer for heavy foot traffic
- 100% Waterproof
- 100% Virgin Vinyl
- Limited 15 year light commercial warranty
- Limited lifetime residential warranty

Cover photo features Bellamy Place™ Acre 9 x 60 plank.

Above photo features Bellamy Place™ Barrel 9 x 60 plank.

SIZES:



9 x 60 WOOD LOOK PLANKS



WHITELOCK BP10



GARDEN BP11



COURTYARD BP12



ACRE BP13



SADDLE BP14



BARREL BP15

6.0 mm | 20 Mil

BELLAMY PLACE™

RIGID CLICK

SPECIFICATIONS

Product Type:	SPC Rigid Core LVF
Installation:	Click
Thickness:	6.0 mm
Wear Layer:	20 Mil (0.508 mm)
Finish:	SuperGuard™ Technology
Size:	9" W x 60" L Plank
Underlayment:	Pad Attached; 1.0 mm IXPE
Bevel:	Painted Bevel
Plank Variation:	4 Unique Planks
Sq. Ft./Carton:	22.38
Pieces/Carton:	6
Weight	7.9 lbs per pc / 47.40 lbs per carton
Installation Advisory:	Bellamy Place™ click LVF uses Uniclic® Locking System; no adhesive required. See daltile.com/LVF for more recommended installation information.
Transitions:	Click LVF transitions are offered in a Vinyl 4-in-1 Transition, Overlap Stair Nose, and Stair Cap. Can be installed with or without underlayment, when total installation is 8.0 mm or less. See daltile.com/LVF for more information.
Warranty:	Limited 15 Year Light Commercial Warranty Limited Lifetime Residential Warranty

PERFORMANCE & CHARACTERISTICS

Construction:	Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl
Classification:	ASTM F1700
Squareness:	ASTM F2421 - Passes
Size and Tolerance:	ASTM F2421 - Passes
Thickness:	ASTM F386 - Passes
Flexibility:	ASTM F137 - Passes
Dimensional Stability:	ASTM F2199 - Passes
Static Load Limit:	ASTM F970 - Passes
Residual Indentation:	ASTM F1914 - Passes
Resistance To Chemicals:	ASTM F925 - Passes
Resistance To Light:	ASTM F1515 - Passes
Resistance To Heat:	ASTM F1514 - Passes

NOTES

See daltile.com/LVF for recommended installation and care guidelines



CERTIFIED BY
SCS Global Services



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com/LVF

PROSERIES™
LUXURY VINYL FLOORING




©2022 Dal-Tile, LLC (7/22)

PERFORMANCE ACCESSORIES

BELLAMY PLACE™ RIGID CLICK TRANSITIONS


Three trims and moldings that are designed to coordinate with each of our existing colors within the collection.

- **VSNP** Overlap Stair Nose (2" x 79")
- **VSCAP** Flush-Mount Vinyl Stair Cap (3" x 46")
- **V4IN1** Four Unique Trims and moldings in one single SKU (2" x 79")
(T-Molding, Hard Surface Reducer, Carpet Transition, End Molding)

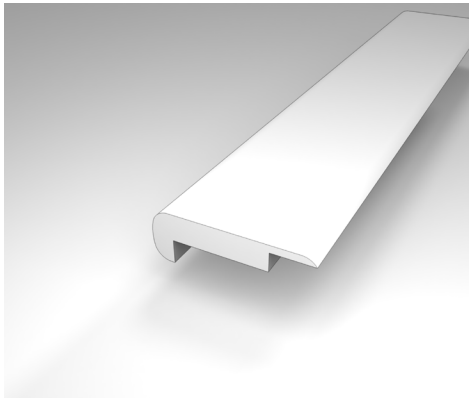


Overlap Stair Nose

Creates a transition to the edge of the step by overlapping the flooring on the back end instead of being flush.

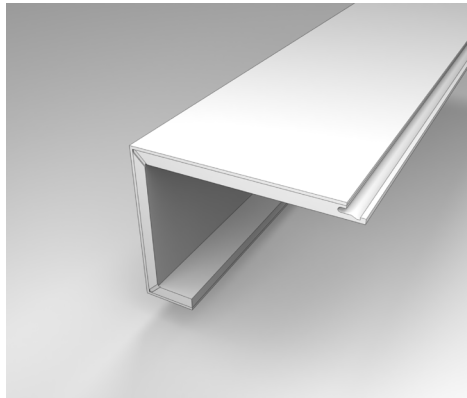

Vinyl Stair Cap


Creates a smooth and flush finish on the edges of steps by using the same vinyl flooring plank to ensure a corresponding color and texture.

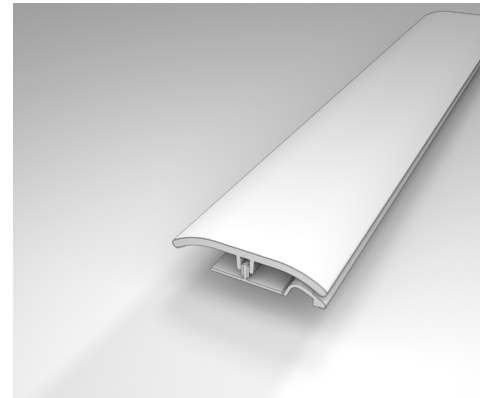

4-in-1 Transition


Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

EACH OF THE BELOW ARE ACHIEVED VIA THE V4IN1 TRANSITION (SHOWN ABOVE)

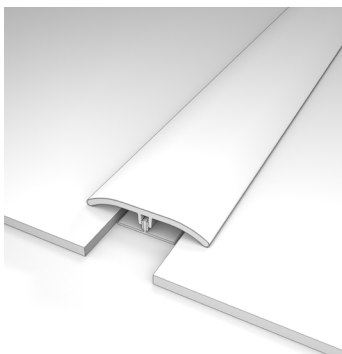


T-Molding

Used to transition between flooring of equal heights and in doorways.

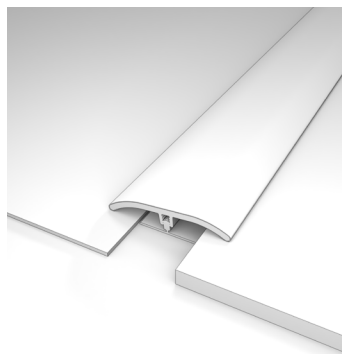


Hard Surface Reducer

Connects two floors of different heights.

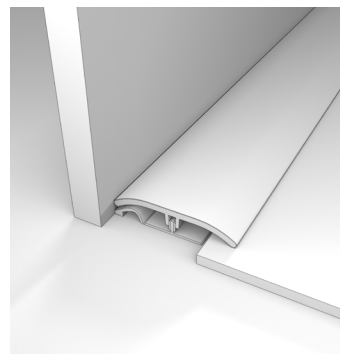

End Molding

Created a smooth and flush finish on the edges of steps where the flooring meets the transition.

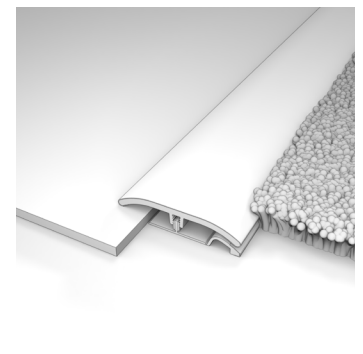

Carpet Transition

Provides a smooth transition between your hard surface floor and carpet.



CERTIFIED BY
SCS Global Services

PROSERIES™
LUXURY VINYL FLOORING

dalTile

©2022 Dal-Tile, LLC (7/22)