

CONCRETE LOOK

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR
- STEPWISE™
- T.E.** TRU-EDGE™
- MADE IN THE U.S.A.
- LARGE FORMAT
- MOSAIC/DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE
- FLEXFIT™


SPECIAL FEATURES

SIZES:



FINISHES: MATTE | STRUCTURED

COLORBODY™ PORCELAIN – SHOWN AS 12 x 24

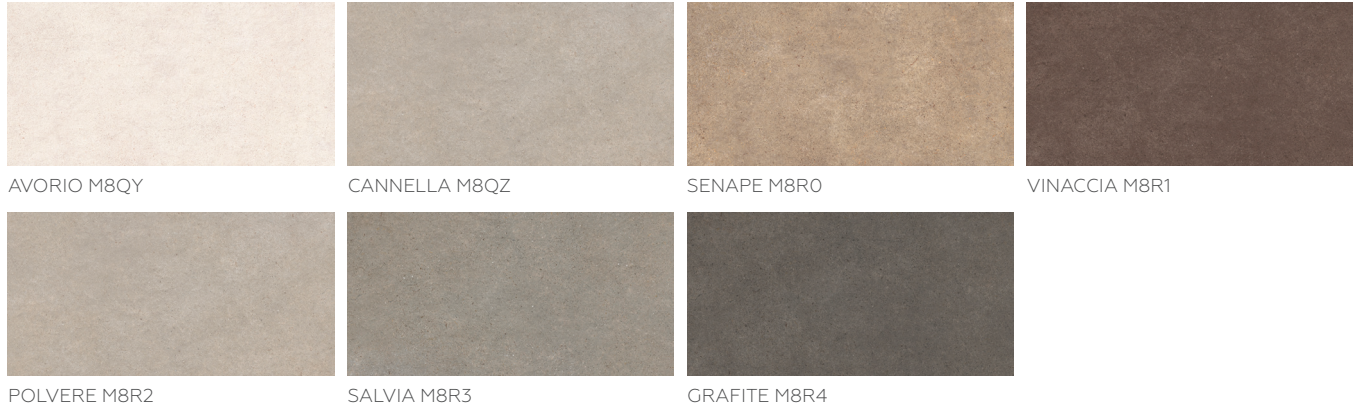

11 x 11 – 3D MOSAIC




8 x 14 – SENAPE MOSAIC




SENAPE / VINACCIA M8L6

8 x 14 – POLVERE MOSAIC



POLVERE / SALVIA M8L7

	MATTE				STRUCTURED		3D MOSAIC	BULLNOSE	
	12 x 24	24 x 24	30 x 30	30 x 60	12 x 24	30 x 30	11 x 11	3 x 24	3 x 30
AVORIO	M8QY	M8QQ	M8JD	M8J4	M8SQ	M8KL	M8L9	M8YF	M8LX
CANNELLA	M8QZ	M8QR	M8JE	M8J5	M8SR	M8KM	M8LA	M8YH	M8LZ
SENAPE	M8R0	M8QS	M8JF	M8J6	M8SS	M8KN	M8LC	M8HJ	M8M1
VINACCIA	M8R1	M8QT	M8JG	M8J7	M8ST	M8KP	M8LD	M8YK	M8M2
POLVERE	M8R2	M8QU	M8JH	M8J8	M8SU	M8KQ	M8LE	M8YL	M8M3
SALVIA	M8R3	M8QV	M8JJ	M8J9	M8SV	M8KR	M8LF	M8YM	M8M4
GRAFITE	M8R4	M8QW	M8JK	M8JA	M8SW	M8KS	M8LG	M8YN	M8M5



- SLIP RESISTANT
- WATERPROOF
- STAINPROOF
- DENTPROOF
- SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes
- FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics
- CLIMATEPRO™
- SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	30 x 60 Floor Tile	(29-1/2" x 59-3/64") (750 mm x 1500 mm)	3/8"	24.22	2
	30 x 30 Floor Tile (Matte & Structured)	(29-1/2" x 29-1/2") (750 mm x 750 mm)	3/8"	12.60	2
	24 x 24 Floor Tile	(23-17/40" x 23-17/40") (595 mm x 595 mm)	3/8"	11.63	3
	12 x 24 Floor Tile (Matte & Structured)	(11-13/16" x 23-9/16") (300 mm x 600 mm)	3/8"	11.63	6
	3D Mosaic	(11-11/50" x 11-11/50" Sheet) (285 mm x 285 mm Sheet)	1/4"	3.44	4
	8 x 14 Senape / Polvere Mosaic	(7-437/500" x 13-193/500" Sheet) (200 mm x 340 mm Sheet)	3/8"	5.81	10

APPLICATIONS



	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

	Type	Size	Pieces/ Carton
	Bullnose	3 x 30	14
	Bullnose	3 x 24	14

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A1371 standards.

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex TRIM modified thin-set is recommended for installation.

 REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

