

SHOWSCAPE™

GLAZED CERAMIC

Turn Any Room into a Showpiece

When design meets innovation, this stunning series is the result. Showscape features Daltile's Visual Imaging™ technology to create striking designs using color dimension and depth, resulting in a multisensory experience of tone and texture. The engaging patterns in this collection are synchronized to flow together regardless of the tile direction. Combined with multiple color options, it provides a range of creative possibilities.

• EASY DESIGN EXPRESSION

- A variety of tones and patterns provide a multitude of combinations to satisfy any creative vision
- Pattern tiles are synchronized to flow together regardless of the tile direction, providing even more options that are easy to execute
- Jolly trim is available in coordinating solid colors to finish off the look

• ENGAGE YOUR SENSES

- Visual Imaging[™] technology adds raised pattern texture that is pleasing to the touch
- Colors ranging from neutral to bold provide visual appeal to match any style



USAGI











































FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.

Cover photo features Showscape Stylish White and Soft Grav 12 x 24 in anabesque pattern on the wall.

Above photo features Showscape Stylish White and Soft Grav 12 x 24 in anabesque pattern on the wa



12 x 24 Wall Tile

FINISHES: GLOSSY | TEXTURED

WALL TILE (SHOWN IN ARABESQUE)



STYLISH WHITE SHO9 (1)



SOFT GRAY SH11 (1)



DEEP GRAY SH12 (1)



CRISP BLUE SH16 (2)



CURRANT SH17 (2)

PATTERN OPTIONS (AVAILABLE IN ALL COLORS)



ARABESQUE (A)



SQUARE LATTICE (B)



CHEVRON (C)



REVERSE DOT (D)




BRUSHSTROKE (E)

WALL TILE AND JOLLY - COORDINATING SOLID COLORS



CRISP BLUE SH16 (2)



CURRANT SH17 (2)

(1) and (2) indicate Price Groups, (1) being the least expensive.









SHOWSCAPE[™]

GLAZED CERAMIC

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	(12" x 24") (30.51 cm x 61.08 cm)	3/8"	16.00	8


APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	~
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of \geq 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest", visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

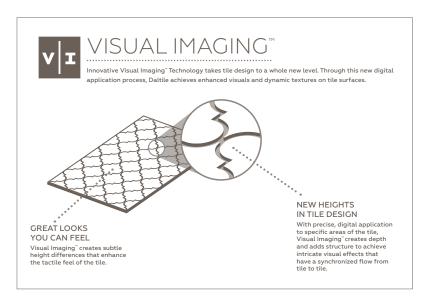

TRIM

Туре	Number	Size	Pieces/ Carton
12" Jolly	S-1/212J	1/2 x 11-15/16	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)	Low (V1)

^{*} Use straight-joint only when using the same pattern.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.





