

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE




FLEXFIT™



SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



4 x 16
Wall Tile



4 x 12
Wall Tile




6 x 6
Wall Tile




3 x 6
Wall Tile

FINISHES: MATTE | GLOSSY

WALL TILE

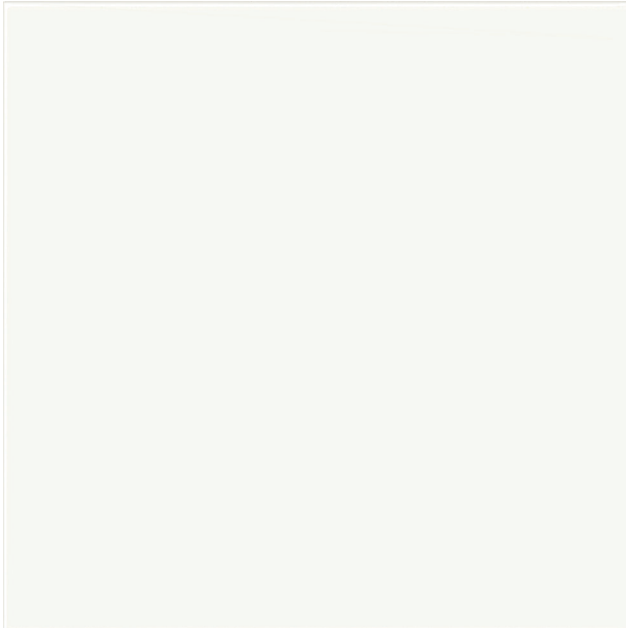


WHITE GLOSSY VV10

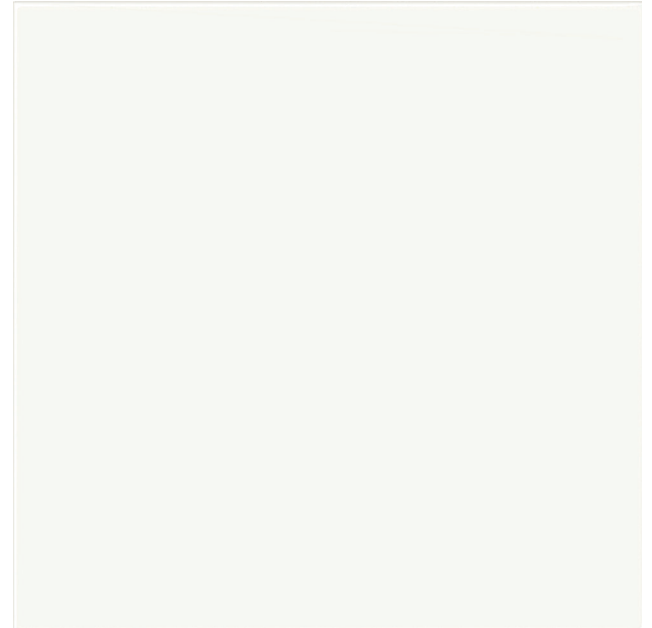

WHITE MATTE VV11



LIGHT GREY GLOSSY VV12

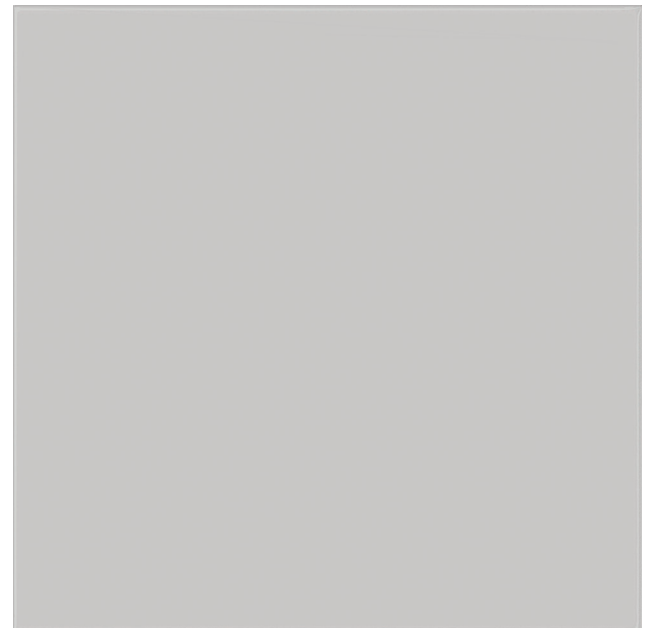

LIGHT GREY MATTE VV13



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

SIZES

| | | | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|---------------------|---|-----------|--------------------|-------------------|
|  | 4 x 16 Wall Tile | (3-15/16" x 15-3/4") (10.00 cm x 40.00 cm) | 1/4" | 14.64 | 34 |
|  | 4 x 12 Wall Tile | (3-15/16" x 11-13/16") (10.00 cm x 30.00 cm) | 1/4" | 10.98 | 34 |
|  | 6 x 6 Wall Tile | (6-1/16" x 6-1/16") (15.46 cm x 15.46 cm) | 1/4" | 13.78 | 54 |
|  | 3 x 6 Wall Tile | (3" x 6-1/6") (7.63 cm x 15.46 cm) | 1/4" | 10.12 | 80 |

APPLICATIONS

| | Target DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor | N/A | |
| Wet & Level – Interior Floor | ≥ 0.42 | |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ✓ |
| Countertops | N/A | |
| Pool Linings | N/A | ✓* |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:












Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* 6 x 6 and 3 x 6 wall tile only

 PRE-CONSUMER
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

| | Type | Number | Size | Pieces/ Carton |
|--|--------------------------|--------|--------|-------------------|
|  | Wall Bullnose (16" side) | S44D9 | 4 x 16 | 34 |
|  | Wall Bullnose (12" side) | S44C9 | 4 x 12 | 34 |
|  | Wall Bullnose (6" side) | S4369 | 3 x 6 | 80 |
|  | Wall Bullnose (6" side) | S4269 | 2 x 6 | 100 |
|  | Wall Bullnose Corner | SN4269 | 2 x 2 | 42 |
|  | Wall Bullnose Corner | SN4339 | 3 x 3 | 50 |
|  | Wall Bullnose Corner | SN4449 | 4 x 4 | 50 |
|  | Quarter Round | A106 | 1 x 6 | 20 |
|  | Quarter Round Corner | UC106 | 1 x 1 | 120 |
|  | Radius Bullnose | A4200 | 2 x 6 | 100 |
|  | Radius Bullnose Corner | AN4200 | 2 x 2 | 200 |

■ Compatible with both 4 x 12 and 4 x 16 wall tile

INSTALLATION

Grout Joint Recommendation

Shade Variation

4x16 & 4x12 Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)



6x6 & 3x6 Wall: 1/16"

PERFORMANCE CHARACTERISTICS

| | ASTM# | Result |
|---------------------|-------|-------------|
| Water Absorption | C373 | < 20.0% |
| Breaking Strength | C648 | 120-230 lbs |
| Scratch Hardness | MOHS | 4.0-6.0 |
| Chemical Resistance | C650 | Resistant |

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles, for more information.



LEARN MORE

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.

 **daltile**®
IMAGINE WHAT'S POSSIBLE™

©2022 Daltile (7/22)