






#### **CONTEMPO WHITE M313**



CONTEMPO WHITE M313 1/2" x 1/2" Mosaic – Polished (12" x 12" Sheet)




CONTEMPO WHITE M313 1-1/2" x 3/4" Basketweave – Honed (12" x 12" Sheet)



CONTEMPO WHITE M313 1-1/2" x 3/4" Oval – Polished (11-3/4" x 12" Sheet)




CONTEMPO WHITE M313\* 5-3/4" x 1/2" Linear – Polished (12" x 12" Sheet)



CONTEMPO WHITE M313 2" x 3" Wedge – Polished (12" x 13-3/8" Sheet)



CONTEMPO WHITE M313 3/8" Random Brick-joint – Split Face (11" x 11" Sheet)



CONTEMPO WHITE M313\* 3/4" x 3/4" High-Low – Split Face (12" x 12" Sheet)



CONTEMPO WHITE M313\* 2" High-Low Random – Polished and Honed (12" x 12" Sheet)

<sup>\*</sup> No grout joint is recommended. Not recommended for wet areas.

# STONE Á LA MOD™

DECORATIVE


#### **URBAN BLUESTONE L222**



URBAN BLUESTONE L222 1/2" x 1/2" Mosaic – Polished (12" x 12" Sheet)



URBAN BLUESTONE L222 1-1/2" x 3/4" Basketweave – Honed (12" x 12" Sheet)



URBAN BLUESTONE L222 1-1/2" x 3/4" Oval – Polished (11-3/4" x 12" Sheet)




URBAN BLUESTONE L222\* 5-3/4" x 1/2" Linear – Polished (12" x 12" Sheet)



URBAN BLUESTONE L222 2" x 3" Wedge – Polished (12" x 13-3/8" Sheet)



URBAN BLUESTONE L222 3/8" Random Brick-joint – Split Face (11" x 11" Sheet)



URBAN BLUESTONE L222\* 3/4" x 3/4" High-Low – Split Face (12" x 12" Sheet)



URBAN BLUESTONE L222\* 2" High-Low Random – Polished and Honed (12" x 12" Sheet)

<sup>\*</sup> No grout joint is recommended. Not recommended for wet areas.

# STONE Á LA MOD DECORATIVE

#### SIZES


|  | Thickness   | Sq. Ft./<br>Carton  | Pieces/<br>Carton   |
|--|---|---|---|
| (12" × 13-3/8")<br>(30.50 cm × 34.00 cm)   | 3/8"  | 4.80  | 5   |
| (12" x 12")<br>(30.50 cm x 30.50 cm)       | 3/8"  | 5.00  | 5   |
| (11-3/4" × 12")<br>(30.00 cm × 30.50 cm)   | 3/8"  | 4.90  | 5   |
| (12" x 12")<br>(30.50 cm x 30.50 cm)       | 3/8"  | 5.00  | 5   |
| (12" x 12")<br>(30.50 cm x 30.50 cm)       | 3/8"  | 5.00  | 5   |
| (11-3/8" x 11-3/8")<br>(29.0 cm x 29.0 cm) | 1/4"-1/2"<br>-3/8"  | 4.55  | 5   |
| (11" x 11")<br>(28.00 cm x 28.00 cm)       | 3/8"  | 4.20  | 5   |
| (12" x 12")<br>(30.50 cm x 30.50 cm)       | 1/4"-1/2"   | 5.00  | 5   |
| (12" x 12")<br>(30.50 cm x 30.50 cm)       | 3/8"  | 5.00  | 5   |
|  | (30.50 cm x 34.00 cm)<br>(12" x 12")<br>(30.50 cm x 30.50 cm)<br>(11-3/4" x 12")<br>(30.00 cm x 30.50 cm)<br>(12" x 12")<br>(30.50 cm x 30.50 cm)<br>(12" x 12")<br>(30.50 cm x 30.50 cm)<br>(11-3/8" x 11-3/8")<br>(29.0 cm x 29.0 cm)<br>(11" x 11")<br>(28.00 cm x 28.00 cm)<br>(12" x 12")<br>(30.50 cm x 30.50 cm) | (12" x 13-3/8") (30.50 cm x 34.00 cm)  (12" x 12") (30.50 cm x 30.50 cm)  (11-3/4" x 12") (30.00 cm x 30.50 cm)  (12" x 12") (30.50 cm x 30.50 cm)  3/8"  (12" x 12") (30.50 cm x 30.50 cm)  3/8"  (12" x 12") (30.50 cm x 30.50 cm)  (11-3/8" x 11-3/8") (29.0 cm x 29.0 cm)  (11" x 11") (28.00 cm x 28.00 cm)  (12" x 12") (30.50 cm x 30.50 cm)  1/4"-1/2" (11" x 11") (28.00 cm x 30.50 cm)  (12" x 12") (30.50 cm x 30.50 cm) | (12" x 13-3/8") (30.50 cm x 34.00 cm) (12" x 12") (30.50 cm x 30.50 cm) (11-3/4" x 12") (30.00 cm x 30.50 cm) (12" x 12") (30.50 cm x 30.50 cm) (11-3/8" x 11-3/8") (29.0 cm x 29.0 cm) (11" x 11") (28.00 cm x 28.00 cm) (12" x 12") (30.50 cm x 30.50 cm) (11" x 11") (28.00 cm x 30.50 cm) (12" x 12") (30.50 cm x 30.50 cm) |

No grout joint is recommended. Not recommended for wet areas. All Stone á la Mod products are mesh-mounted.

### **APPLICATIONS**

|  | Target<br>DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor   | N/A                |          |
| Wet & Level – Interior Floor   | ≥ 0.42             |          |
| Shower Floors (Residential or Light Commercial)  | ≥ 0.42             |          |
| Exterior Floor Applications<br>(including pool decking & other<br>wet areas with minimal footwear) | ≥ 0.60             |          |
| Ramps & Inclines   | ≥ 0.65             |          |
| Walls/Backsplashes   | N/A                | <b>✓</b> |
| Countertops  | N/A                |          |
| Pool Linings   | N/A                |          |
|  |                    |          |

A DCOF value of  $\geq$ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest $^{\text{TM}}$ , visit daltile.com/DCOF.

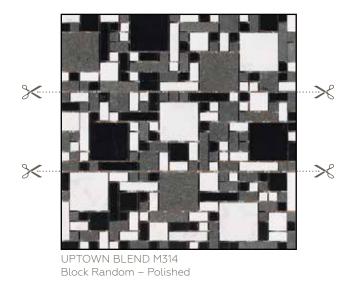

#### INSTALLATION

| Grout Joint Recommendation | Shade Variation |  |
|----------------------------|-----------------|--|
| 1/16"                      | High (V3)       |  |

## NOTES

Natural stone products inherently lack uniformity and are subject to variation in aesthetics (color, shade, finish, etc.) and performance (hardness, strength, slip resistance, etc.). Natural stone products do not meet minimum coefficient of friction thresholds recommended by safety standard setting organizations. Check local building codes prior to specification or installation to verify that product technical characteristics comply with required parameters. Final selection should be made from actual tiles and trim, and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

The existence and dimensions of a bevel may vary from lot to lot. Be sure to request a sample of the specific lot you are planning to order, if the bevel is an important feature of your job.

For additional application and technical information, refer to the "Stone Usage Guide" at daltile.com/sug.



