

DAS 2920  
Built-in ventilation hood  
with EasySwitch controls for convenient operation




- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516495857 / Material number: 11878500 / Old Material Number: 28S2920SUSA

<b>Construction type</b>	
Built-in ventilation hood	•
<b>Operating modes</b>	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
<b>Design</b>	
Color	Stainless steel
<b>Control panel</b>	
Electronic controls	•
Touch controls on glass	•
<b>Cleaning convenience</b>	
Easy to clean canopy interior CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless-steel grease filters	1
<b>Lighting</b>	
LED	•
Number x W	1 x 3,0 W
Light intensity in Lx	300 lx
Color temperature in K	3500 Kelvin
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
<b>Installation notes</b>	
Vent connection at top	•
<b>Accessories supplied</b>	
Non-return flap	•
<b>Optional accessories</b>	
OdorFree charcoal filter	Nein

## DAS 2920 Built-in ventilation hood with EasySwitch controls for convenient operation

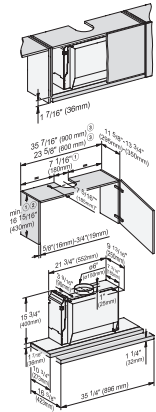

DAS2920, DAS4920, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet., , \*In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.