
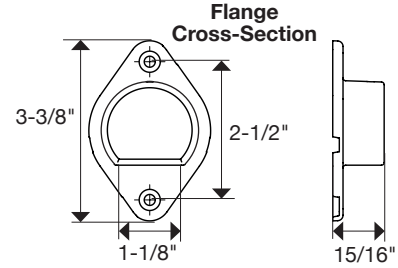
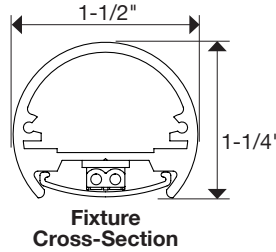



18 in. Satin Nickel fixture shown
 LC9R18-4NDSN30

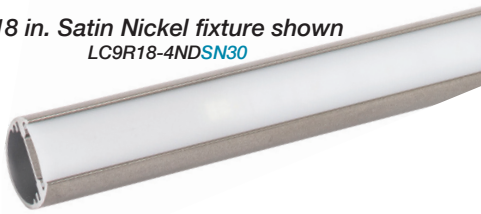

HIGHER LIGHT OUTPUT – 6 WATTS PER FOOT

| PART NUMBER | DESCRIPTION | DIMENSIONS | LUMENS Based on 3000K (approx. per fixture) | FINISH OPTION | KELVIN TEMP. |
|-----------------------------------|--|-----------------------|---|------------------|--|
| LC9R18-4ND ^{FinishTemp} | 18" Lighted Closet Rod. 4 watts per fixture. | 18" x 1-1/2" x 1-1/4" | 400 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R24-6ND ^{FinishTemp} | 24" Lighted Closet Rod. 6 watts per fixture. | 24" x 1-1/2" x 1-1/4" | 600 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R30-8ND ^{FinishTemp} | 30" Lighted Closet Rod. 8 watts per fixture. | 30" x 1-1/2" x 1-1/4" | 800 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R36-10ND ^{FinishTemp} | 36" Lighted Closet Rod. 10 watts per fixture. | 36" x 1-1/2" x 1-1/4" | 1000 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R42-12ND ^{FinishTemp} | 42" Lighted Closet Rod. 12 watts per fixture. | 42" x 1-1/2" x 1-1/4" | 1200 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R48-14ND ^{FinishTemp} | 48" Lighted Closet Rod. 14 watts per fixture. | 48" x 1-1/2" x 1-1/4" | 1400 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R54-16ND ^{FinishTemp} | 54" Lighted Closet Rod. 16 watts per fixture. | 54" x 1-1/2" x 1-1/4" | 1600 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R60-18ND ^{FinishTemp} | 60" Lighted Closet Rod. 18 watts per fixture. | 60" x 1-1/2" x 1-1/4" | 1800 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R66-20ND ^{FinishTemp} | 66" Lighted Closet Rod. 20 watts per fixture. | 66" x 1-1/2" x 1-1/4" | 2000 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R72-22ND ^{FinishTemp} | 72" Lighted Closet Rod. 22 watts per fixture. | 72" x 1-1/2" x 1-1/4" | 2200 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R78-24ND ^{FinishTemp} | 78" Lighted Closet Rod. 24 watts per fixture. | 78" x 1-1/2" x 1-1/4" | 2400 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R84-26ND ^{FinishTemp} | 84" Lighted Closet Rod. 26 watts per fixture. | 84" x 1-1/2" x 1-1/4" | 2600 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R90-28ND ^{FinishTemp} | 90" Lighted Closet Rod. 28 watts per fixture. | 90" x 1-1/2" x 1-1/4" | 2800 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |
| LC9R96-30ND ^{FinishTemp} | 96" Lighted Closet Rod. 30 watts per fixture. | 96" x 1-1/2" x 1-1/4" | 3000 | BK, BZ SN, WT | 2700K (27), 3000K (30) 4000K (40), 5000K (50) |


Blue indicates customer choice. Finish indicates fixture finish color. Temp indicates Kelvin Temperature. 20 gauge solid wire ONLY. Push in connectors located on both ends of each sempriaLED fixture.

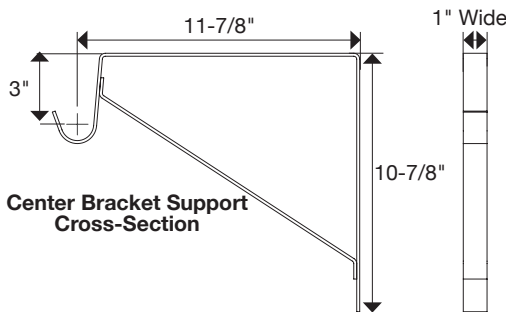

OPTIONAL INSTALLATION COMPONENTS

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|-----------------------------|---|------------------------|
| LC9R-CBS- ^{Finish} | Center Bracket Support (Use every 48") Available in Black (BK), Bronze (BZ), Satin Nickel (SN) or White (WT) | 11-7/8" x 1" x 10-7/8" |
| SG9-WW-48 ^{Color} | 48" field-cuttable WireWay. Available in Black (BK), Grey (GR), 48" x 3/4" x 11/16" or White (WT) | |

FINISH OPTIONS



INSTALLATION COMPONENTS

| PART NUMBER | DESCRIPTION | OUTSIDE DIAMETER |
|-----------------|--------------------------------------|---------------------|
| T-CW20G-SOL-25 | 25 ft. spool of 20/2 AWG solid wire | 9/64" |
| T-CW20G-SOL-50 | 50 ft. spool of 20/2 AWG solid wire | 9/64" |
| T-CW20G-SOL-100 | 100 ft. spool of 20/2 AWG solid wire | 9/64" |
| T-CW20G-SOL-1 | 20/2 AWG solid wire sold per foot | 9/64" |

FEATURES

- Circular Closet Rod – 1-1/4"
- 50,000 hour LED life at 70% lumen maintenance
- 90 CRI (Color Rendering Index – true color)
- High LED diode density boards create No Dot effect
- Concealed wire management
- Each end is field trimmable up to 3"
- Simple to install fully assembled fixture with frosted, light-diffusing lens
- 5-year limited warranty
- Each LED under goes a 4-hour burn in test
- Designed for indoor application
- No UV or IR
- Dimmable (with compatible dimmer)
- Flange set included with each closet rod
- Accessories sold separately: WireWay and Center Bracket Support
- 12 volt DC plug-in or hardwired power supply required (order separately)

APPLICATIONS

- Under Cabinet
- Cove
- Display Case

TECHNICAL INFORMATION

| | |
|--------------------------------------|--|
| Series | Lighted Closet Rod |
| Input Voltage | 12 volt DC |
| Color Temperature (Kelvin) | Warm white 2700K (27) Soft white 3000K (30) Cool white 4000K (40) Daylight white 5000K (50) |
| CRI (Color Rendering Index) | 90+ |
| Wattage | 1/4 watt LEDs |
| Lumens | 400 lumens per foot |
| Max Run | Refer to power supply specs |
| Cuttable | No |
| IP Rating | ---- |
| Dimmable | 5% – 100% |
| Rating | cULus Listed |
| Rated Life | 50,000 hrs |
| LED Beam Angle | 120° |
| LED Spacing | 1/4" |
| LED Board | 6" or 12" |
| Mounting | Flange Set, Screws (included) |
| Wiring | 20/2 solid ONLY |
| Environment | Dry locations |
| Construction Material | Extruded aluminum (heatsink), IR Acrylic (lens) |
| Warranty | 5 years |

COMPATIBLE POWER SUPPLIES

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|------------------------|--|-------------------------------|
| T-12W-12V-PI | 12 watt AC/DC 2 prong plug-in, 12 volt DC 1 AMP. | 2-15/16" x 1-3/16" x 1-13/16" |
| T-24W-12V-PI | 24 watt AC/DC 2 prong plug-in, 12 volt DC 2 AMP. | 3-11/16" x 1-7/8" x 1-5/16" |
| T-36W-12V-PI | 36 watt AC/DC 2 prong plug-in, 12 volt DC 3 AMP | 3-3/4" x 2" x 1-5/16" |
| T-60W-12V-PI | 60 watt AC/DC 2 prong plug-in, 12 volt DC 5 AMP | 5-1/8" x 2-1/16" x 1-1/4" |
| T-96W-12V-PI | 96 watt AC/DC 3 prong plug-in, 12 volt DC 8 AMP. | 5-1/2" x 2-3/8" x 1-3/8" |
| T-120W-12V-PI | 120 watt AC/DC 3 prong plug-in, 12 volt DC 10 AMP | 6-3/8" x 2-11/16" x 1-1/4" |
| T-60W-12-WP-HW | 60 watt, 12 volt IP67 rated waterproof LED hardwired | 6-1/2" x 1-5/8" x 1-1/4" |
| T-150W-12-WP-HW | 150 watt, 12 volt IP67 rated waterproof LED hardwired. | 7-3/8" x 2-3/8" x 1-1/2" |
| T-DT24W-12V-HW | 24 watt 12 volt DC dimmable class 2 LED hardwired. | 13-3/4" x 3" x 1-5/8" |
| T-DT48W-12V-HW | 48 watt 12 volt DC dimmable class 2 LED hardwired | 13-3/4" x 3" x 1-5/8" |
| T-DT60W-12V-HW | 60 watt 12 volt DC dimmable class 2 LED hardwired | 13-3/4" x 3" x 1-5/8" |
| T-DT120W-12V-HW | 120 watt 12 volt DC dimmable LED hardwired | 15" x 3-1/8" x 2-1/2" |
| T-WAV-60W-PSR | 60 watt AC/DC 2 prong plug-in, 12 volt DC 5 AMP with built in smart LED receiver | 7-1/4" x 2-7/8" x 1-5/8" |

COMPATIBLE DIMMING SYSTEMS / SWITCHES

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|---------------------------|--|---------------------------|
| T-Q-1Z-WC-RF-Color | Uno 1-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-Q-2Z-WC-RF-Color | Duo 2-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-Q-4Z-WC-RF-Color | Quattro 4-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-TWAV-WR-120 | WAV 120 watt smart LED Receiver. Use with a Wireless Controller | 4-1/4" x 2-1/4" x 3/8" |
| T-Q-WR96 | 96 watt LED Receiver. Use with a Wireless Controller | 3-3/8" x 1-1/2" x 13/16" |
| T-Q-WR240 | 240 watt LED Receiver. Use with a Wireless Controller. | 6-7/16" x 1-7/8" x 15/16" |
| T-DSS-30W-IR | Infrared (IR) door sensor switch. | 3/8" x 1" x 1-1/4" |
| T-2HDSS-30W-IR | Infrared (IR) door sensor switch with two heads | 3/8" x 1" x 1-1/4" |
| T-MSS-60W | Motion sensor switch | 1/2" x 2-1/4" |
| T-PSS-60W-IR | Infrared (IR) sensor proximity switch. | 2-1/4" x 3/8" |
| T-TDS-60W | LED touch dimmer. | 3/8" x 2" x 2" |
| T-WSS-60W-IR | Infrared (IR) wave sensor switch | 2-1/4" x 3/8" |
| DVLV-600P-Color | 600W Diva slide dimmer. | 4.69" x 2.94" x 1.31" |
| T-RS-BK | On / off round switch | 15/16" |
| T-WAV-AC120V-R | WAV 120 volt AC/AC Smart Receiver | 1-3/4" x 1-3/4" x 13/16" |