AETHER 2"- Round Adjustable Trimless

R2ARAL

WAC LIGHTING

Responsible Lighting®



Fixture Type:	
Catalog Number:	
Project:	

Location:

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- · Designed to fit in tight plenum
- · Wet location listed for trims
- 2" trim aperture, 2" housing height
- 35° cut-off angle
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty
- 0-25° vertical and 365° horizontal adjustment

SPECIFICATIONS

Construction: Die-cast aluminum trim with die-cast aluminum heat sink

Dimming: 100% - 1% with 0-10V (120V - 277V)

100% - 5% with Electronic Low Voltage (ELV)/TRIAC (120V only)

Input: 120V-277V AC

Power: 15W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated white, black, haze

Standards: UL & cUL Listed, wet location listed trims

Ceiling thickness: 1/2" - 1"

TRIM (SEE NEXT PA	AGE FOR HOUSING)	Beam	Color Temp	CRI	Lumen	CBCP	Finish	Interior/Trim
R2ARAL Round	$\begin{array}{c c} & 2\frac{5}{8}" & -1 \\ & 5\frac{7}{8}" & -1 \end{array}$	N 22°	827 2700K 830 3000K 835 2700K 840 4000K 927 2700K 930 3000K	85 85 85 85 90	1295 1365 1390 1405 1080 1120	3560 3745 3820 3858 2968 3078	HZ WT BK	Haze White Black
	5	F 40°	827 2700K 830 3000K 835 2700K 840 4000K 927 2700K 930 3000K	85 85 85 85 90	1270 1335 1360 1375 1055	1943 2044 2085 2105 1620 1680	HZ WT BK	Haze White Black

R3A__AL___-Example: R3ARAL-N930-HZWT


waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

AETHER - Housing

HR-2LED-H13A

WAC LIGHTING

Responsible Lighting®

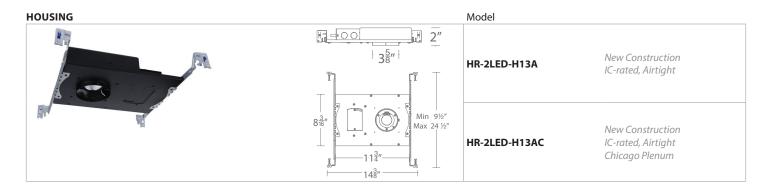

HR-2LED-H13____

Example: HR-2LED-H13A