MOLF

DD45

FEATURES

Breathe cleaner air and enjoy less greasy residue in your kitchen

"Disappears" when not in use for a sleek, minimal look and use in open-concept kitchens

Lowers when not in use, and rises 14 inches to whisk away smoke and odors

Matches the heavy-gauge stainless steel look of Sub-Zero, Wolf, and Cove

Select from internal, in-line, or remote blower options (blower required)

Automatically turns off the blower with a five-minute "delay-off" feature

Minimizes the backward flow of cold air with backdraft transition

Install a reversible motor box on either side of the downdraft for design flexibility

ACCESSORIES

10" Round Inline Damper

8" Round Inline Damper

Make-Up Air Damper

Recirculating Filter

Recirculating Kit

Inline Blowers

Internal Blowers

Remote Blowers

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.



BLOWER OPTIONS


- 600 CFM Internal
- 600 CFM Inline
- 600 CFM Remote
- 1200 CFM Remote



PRODUCT SPECIFICATIONS


Model	DD45
Dimensions	45"W x 14"H x 2"D
Weight	85 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	6" round internal or 10" round inline or remote
Receptacle	3-prong grounding-type

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS



NOTE: Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.

STANDARD INSTALLATION

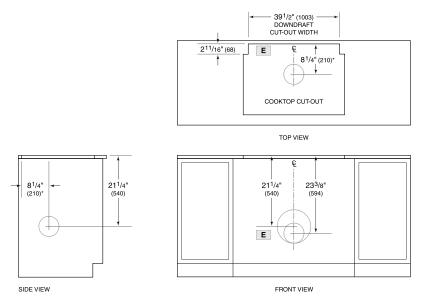

 $^{\star}6^{\prime\prime}$ (152) back from countertop cut-out when internal blower is rear mounted.

NOTE: Internal blower 6* (152) round, side, rear or bottom discharge. In-line and remote blower 10* (254) round, rear discharge. Centerline indicates center of downdraft cut-out.