

### Features

- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- 125-micron filter protects internal components
- No external flush volume adjustment ensures water conservation
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Powered by a 30 year/875,000 cycle hybrid energy cell, based on 72 uses per day
- Less stop valve and tailpiece

### Material

- Brass construction with durable Polished Chrome finish

### Technology

- Flushometer activates when hand is waved over electronic infrared WAVE sensor
- Patented piston technology for superior flush volume accuracy

### Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection

### Recommended Products/Accessories

K-23723 Faucet cleaner  
1421939  
1509698

### Optional Products/Accessories

GP1118986  
K-10313 Flushometer 12" rough-in kit



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome

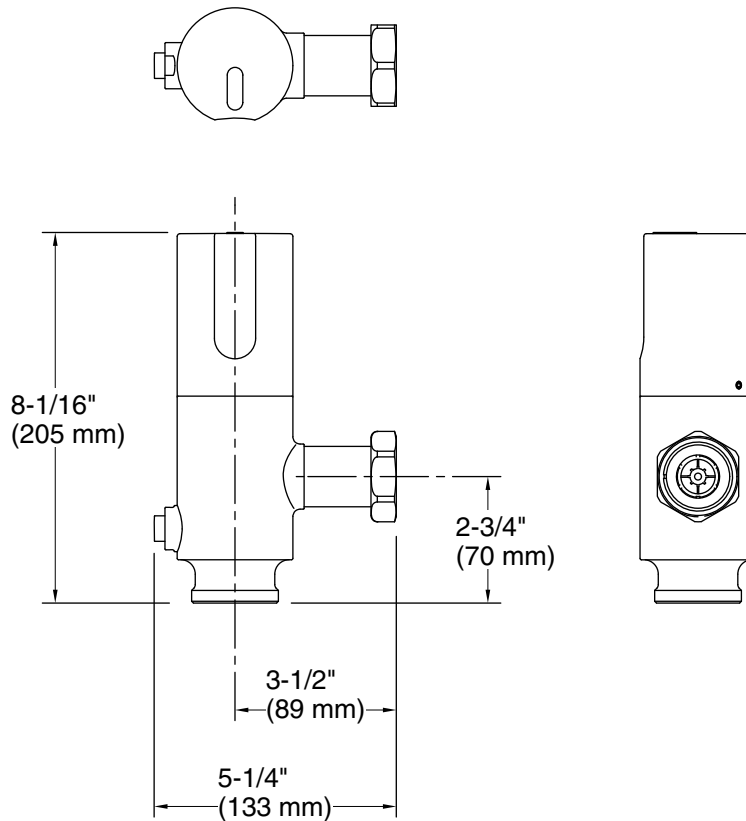

**Technical Information**

All product dimensions are nominal.

Power source: Hybrid Energy Cell, not included  
 Drain included: No

**Pressure/fixture Supply Requirements**

Fixture pressure 80 psi (551.6 kPa)  
 max (static):  
 Fixture pressure min 25 psi (172.4 kPa)  
 (static):  
 Min flowing 25 psi (172.4 kPa)  
 pressure:  
 Min flow rate: 25 gpm (94.6 lpm)

**Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.