MOLF

PWC542418

FEATURES

Breathe cleaner air and enjoy less greasy residue in your kitchen

Make a statement with a stainless professional look or opt for lower-profile "hidden" ventilation

Matches the same heavy-duty stainless-steel construction, hand-finished hemmed edges, and welded seams of all Sub-Zero, Wolf, and Cove products

Select from internal, in-line, or remote blower options (blower required)

Illuminates your cooking area with halogen lighting with two brightness settings

Rely on a heat sentry that automatically turns on the blower or increases its speed when exhaust temperatures exceed 200 degrees Fahrenheit

Minimizes the backward flow of cold air with backdraft transition

ACCESSORIES

Backsplash

Backsplash with Warming Racks

Make-Up Air Damper


Inline Blowers

Internal Blowers

Remote Blowers

Pro Chimney Hood Duct Covers

Accessories available through an authorized dealer. For local dealer information, visit subzero-wolf.com/locator.

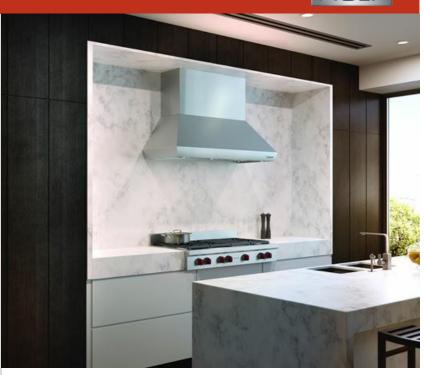

BLOWER OPTIONS


- 300 CFM Internal
- 400 CFM Internal
- 600 CFM Internal
- 800 CFM Internal
- 1200 CFM Internal
- 600 CFM Inline
- 1100 CFM Inline
- · 600 CFM Remote
- 900 CFM Remote
- 1200 CFM Remote
- 1500 CFM Remote



PRODUCT SPECIFICATIONS

| Model | PWC542418 |
|---------------------------------|--------------------------|
| Dimensions | 54"W x 18"H x 24"D |
| Weight | 106 lbs |
| Electrical Supply | 110/120 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Discharge Location | Vertical |
| Discharge Dimensions | 10" Round |
| Bottom of Hood to Countertop | 30" to 36" |

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

